

SUPREME HARNESS: TOWER WORKER

PART CODE: **H402**



**HEIGHT
SAFETY**

PRODUCT FEATURES >

- Pebble Weave Webbing design provides maximum grip for buckles, eliminating webbing slippage and the need for continual re-adjustment.
- Liqui-Pel Technology for liquid protection, also easier to clean the harness.
- High Tenacity UV stabilised webbing, enhances resistance to solvents and UV light degradation.
- Retro-Reflective Thread in webbing for improved visibility in low light.
- Rear Barr D allows easier access and better weight distribution for twin retractable fall arrest devices.
- Closed Loop Webbing system on rear Dorsal D maintains positioning of Dorsal D in the event of a fall. Significantly reducing the risk of injury from hardware hitting the back of workers head.
- Extended Belay Loops make connection of hardware easier, also maintains absolute front and centre positioning.
- Sub Pelvic Strap integration along the line of Belay Loops, places the worker away from hardware in the event of a fall, significantly reducing the risk of injury from hardware hitting the worker.
- Articulated Chest Strap and shoulder adjustment points, designed for additional user comfort and female users, due to lower positioning of strap.
- Air COOL Padded Shoulder Straps for increased comfort and increased air flow during long periods of use.
- Padded Sub Pelvic Seat for Pole Strap restraint High Comfort spec.
- Quick Release Buckles. Padding under buckles. Adjustable Waist Belt with tool loop attachments.
- Large Pole strap O-rings for ease of connecting Pole Strap (work positioning).
- Forward placed pole strap attachment points makes for easier to reach connection.
- Service Pouch on back. Comes with Harness Bag.

APPLICATIONS >

Fall Arrest, Construction, Ladder, Scaffolding, Warehouse, Confined Space, Positioning Restraint, Tower Work.

STANDARDS >



AS/NZS 1891.1:2020
BMP 713822
BMP 713823
Australian Standard



**Working
at Height
Association**
Reaching new levels in safety



LINQ
TEST
LAB
FACILITY

WORLD RECOGNISED
ACCREDITATION

Reading of LINQ instruction manual prior to use is mandatory. Description and specification subject to change without notice.



PARAMOUNT SAFETY PRODUCTS AUSTRALIA
12 FELLOWSHIP ROAD,
GNANGARA, WA 6077
TECH SUPPORT: 1300 546 747
CUSTOMER SERVICE: 1300 770 723
EMAIL: INFO@PARAMOUNTSAFETY.COM

PARAMOUNT SAFETY PRODUCTS NEW ZEALAND
7 SIR WOOLF FISHER DRIVE, Highbrook,
EAST TAMAKI, AUCKLAND 2013
TECH SUPPORT: 0800 888 778
CUSTOMER SERVICE: 0800 888 778
EMAIL: INFO@PARAMOUNTSAFETY.CO.NZ

LINQS.COM
PARAMOUNTSAFETY.COM

**HEIGHT
SAFETY**
FROM
**PARAMOUNT
SAFETY PRODUCTS**

SUPREME HARNESS: TOWER WORKER

PART CODE: **H402**



**HEIGHT
SAFETY**

PRODUCT DETAILS >

- AUS/NZ designed and engineered
- Size ranges available - Small, Standard (M-L) and Maxi (XL-2XL)
- 10-year life span from date of manufacture



**STAINLESS
STEEL
REAR
BARR D**



**STAINLESS
STEEL
QUICK
RELEASE
BUCKLES**



**FRONT FALL
ARREST
ATTACHMENT
POINTS**




**AIR COOLED
PADDED
SHOULDER
AND LEGS
STRAP**



**CONFINED
SPACE
SPREADER
BAR
ATTACHMENT
POINTS**



**SIDE WORK
POSITIONING
O-RINGS**

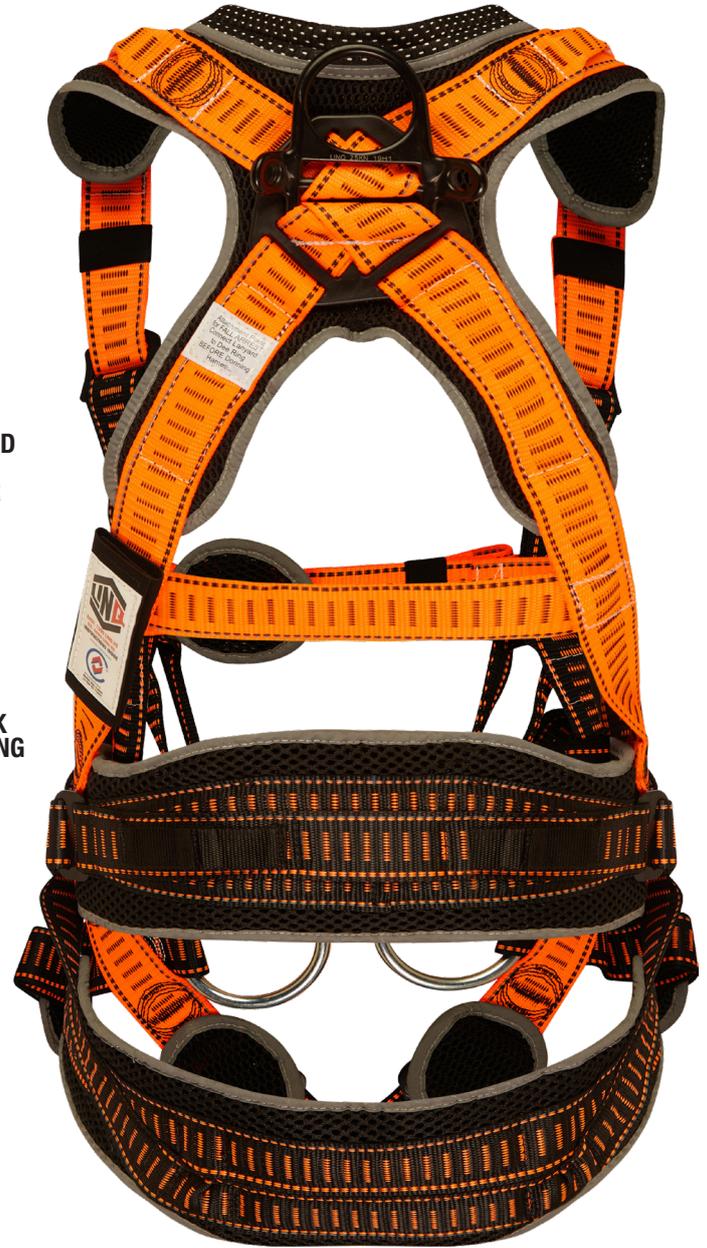

TECHNICAL INFORMATION >

- **Webbing Material:** Polyester; 45mm; UV Resilient; Liqui-pel water guard option as standard
- **Fall Arrest Hardware:** Drop Forged corrosion resistant electrophoresis; high strength alloy steel.
- **Thread:** Polyester; 9.81 Newtons (10kg) extension at break 19.5%
- **Stitch Pattern:** THETA Pattern combines 313 stitches to exceed 28kN of strength; AS/NZ compliant colour contrast
- **Plastic Material:** UV stabilised high-density polyethylene
- **Weight:** 2.7kg
- **Web Tenacity:** 28kN
- **Buckle Strength:** 12 to 17kN. Laser etched or hard marked on buckle
- **Padding Material:** Neoprene laminate



**Working
at Height
Association**
Reaching new levels in safety



**GOLD
MEMBER**



NATA
WORLD RECOGNISED
ACCREDITATION

**LINQ
TEST
LAB
FACILITY**

Reading of LINQ instruction manual prior to use is mandatory. Description and specification subject to change without notice.

PARAMOUNT SAFETY PRODUCTS AUSTRALIA

12 FELLOWSHIP ROAD,
GNANGARA, WA 6077
TECH SUPPORT: 1300 546 747
CUSTOMER SERVICE: 1300 770 723
EMAIL: INFO@PARAMOUNTSAFETY.COM

PARAMOUNT SAFETY PRODUCTS NEW ZEALAND

7 SIR WOOLF FISHER DRIVE, HIGHBROOK,
EAST TAMAKI, AUCKLAND 2013
TECH SUPPORT: 0800 888 778
CUSTOMER SERVICE: 0800 888 778
EMAIL: INFO@PARAMOUNTSAFETY.CO.NZ

LINQS.COM
PARAMOUNTSAFETY.COM



FROM

**PARAMOUNT
SAFETY PRODUCTS**